





# PLX-Pure Lead High Rate PLX12-260FT(A) (12V260W)



## Applications

- UPS
- Emergency lighting
- Emergency power supply
- Electrical starting
- Power tools


## General Features

- 15 years design life(25°C)
- Premium ABS+PC jar & covers, Flame Retardant to UL94 V-0
- High-rate performance, high energy density
- High quality AGM separators minimize electrical resistance to allow high current discharging properties


## Standards

- Compliance with IEC 60896 standard
- Classified as "Very Long Life" according to Eurobat
- CE, UL Certified
- Manufactured in Leoch®IATF 16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


## Discharge Characteristics

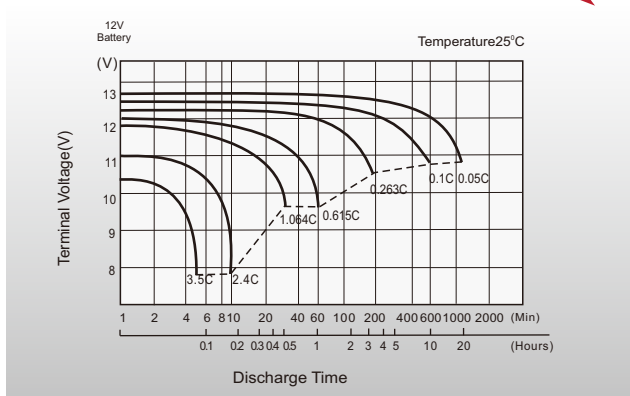

## Float Charging Characteristics

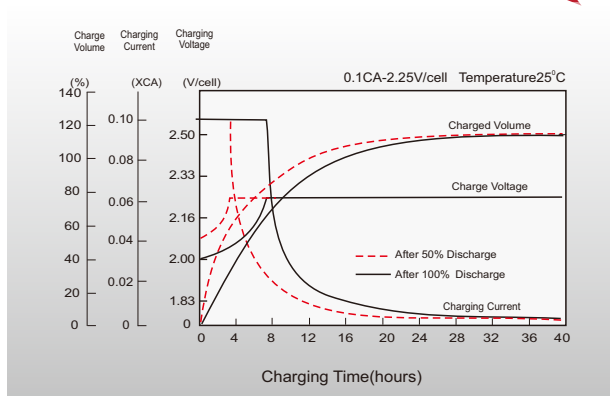

## Effects of Temperature on Discharging Time

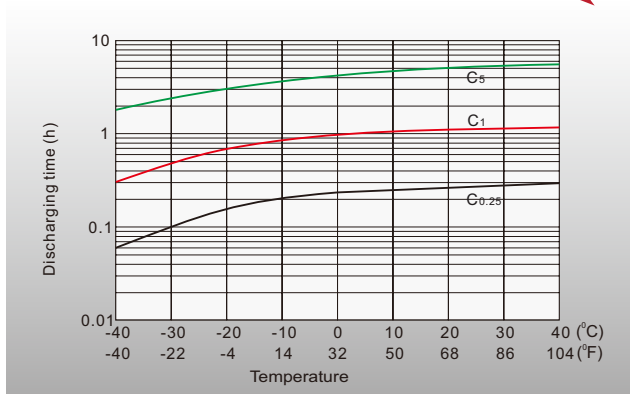

## Self-discharge Characteristics

